



# BLU SERIES

UPG No. 40921

## Sealed Lead-Acid Power Cell

Absorbant Glass Mat (AGM) technology for superior performance. Valve regulated, spill proof construction allows safe operation in any position. Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified. U.L. recognized under file number MH 20567.

# HC600-BLU



Due to continuous improvements to our products, product may vary slightly from depiction.

### Specification

<b>Nominal Voltage</b>	12 volts		
<b>Nominal Capacity</b>	77° F (25° C)		
20-hr. (0.90A)	18.0 Ah		
10-hr. (1.67A)	16.7 Ah		
5-hr. (3.06A)	15.3 Ah		
1-hr. (10.8A)	10.8 Ah		
<b>Max. Wattage</b>	600 W		
<b>Approximate Weight</b>	11.9 lbs (5.4 kg)		
<b>Internal Resistance (approx.)</b>	18mΩ		
<b>Shelf Life</b> (% of normal capacity at 77° F (25° C))			
3 Months	6 Months	12 Months	
91%	82%	64%	
<b>Temperature Dependency of Capacity</b>	(20 hour rate)		
104° F	77° F	32° F	5° F
102%	100%	85%	65%
<b>AGM Operational Temperature</b>			
Charge	0°C to 40°C		
Discharge	-15°C to 45°C		
<b>AGM Storage Temperature</b>	-15°C to 40°C		

### Charge Method (Constant Voltage)


### Cycle Use (Repeating Use)

Initial Current	5.4 A or smaller
Control Voltage	14.6-14.8 V

### Float Use


Control Voltage	13.6-13.8 V
-----------------	-------------

### Physical Dimensions: in (mm)

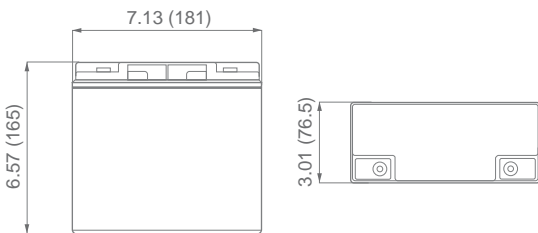

**L:** 7.13 in (181 mm)  
**W:** 3.01 in (76.5 mm)  
**H:** 6.57 in (165 mm)  
 Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.


### TERMINALS (Internal Thread)




Type	Dimension	M	Ø	H
I <sub>6</sub>		6.00 mm 0.24 in	16.0 mm 0.63 in	4.00 mm 0.16 in

**Polarity**  
Positive on Right

### DISCHARGE TIME VS. DISCHARGE CURRENT

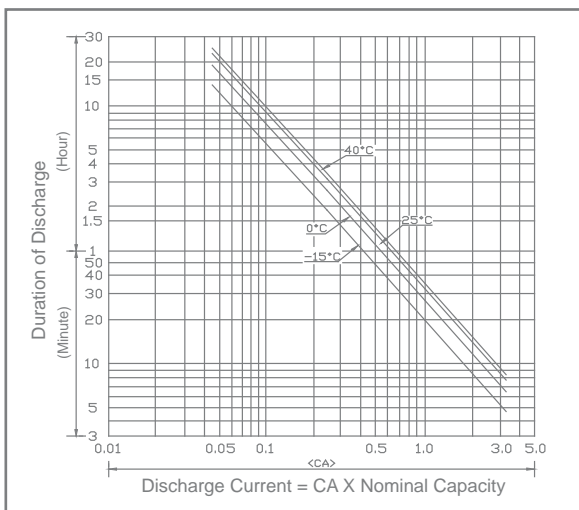

### DISCHARGE CHARACTERISTICS

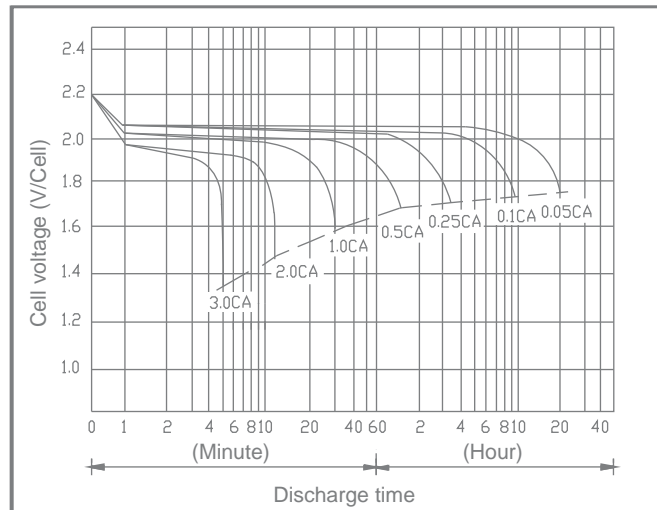

All specifications are subject to change without notice.



www.kinetikpower.com

488 S. Royal Lane | Coppell, Texas 75019 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@upgi.com

Copyright©2016 Universal Power Group, Inc. All rights reserved. Kinetik® is a registered trademark of Universal Power Group, Inc.




# BLU SERIES

Sealed Lead-Acid Power Cell


UPG No. 40921

# HC600-BLU


## SHELF LIFE & STORAGE

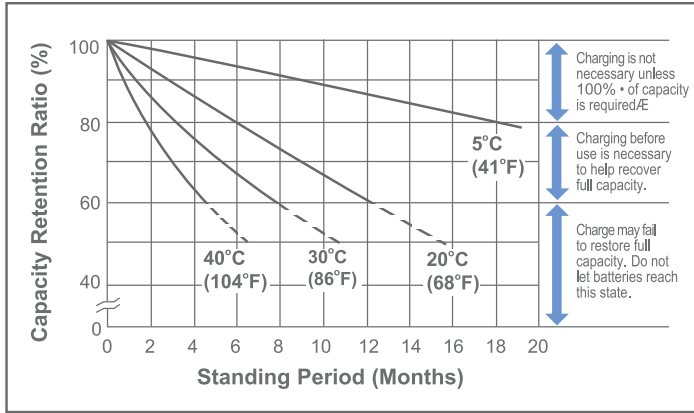


## CYCLE LIFE VS DEPTH OF DISCHARGE

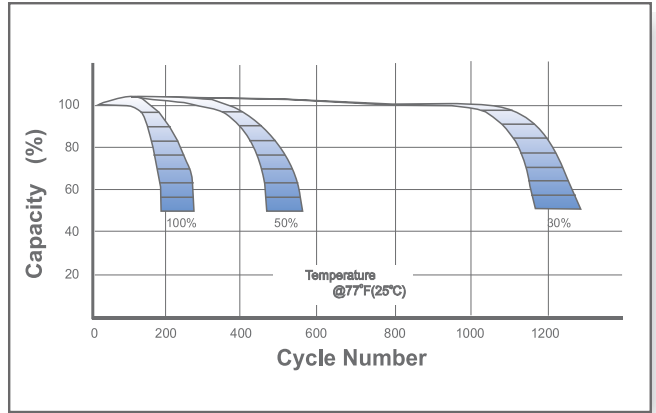

## OPEN CIRCUIT VOLTAGE VS RESIDUAL CAPACITY

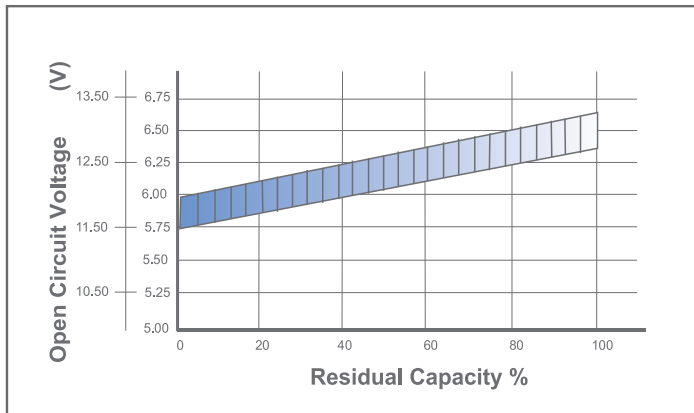

## EFFECT OF TEMPERATURE ON CAPACITY

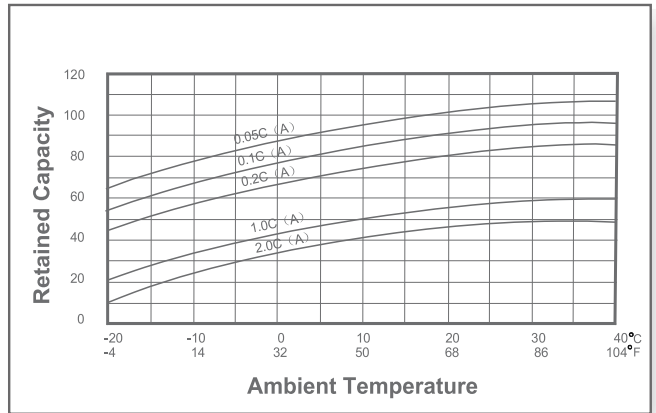

## CHARGE CURRENT & FINAL DISCHARGE VOLTAGE

Application	Charge Voltage(V/Cell)			Max.Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C(77°F)	2.45	2.43~2.47	0.30C
Standby	25°C(77°F)	2.28	2.27~2.30	
Final Discharge Voltage V/Cell	1.75	1.70	1.60	1.30
Discharge Current(A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C

