



# AP SERIES POWERSPORTS BATTERIES

## STANDARD CONVENTIONAL

UPG No. 41517  
**AP6N5.5-1D**  
Equivalent to 6N5.5-1D

### Specification


<b>Nominal Voltage</b>	6 Volts
<b>Nominal Capacity (10H-R)</b>	5.5 Ah
<b>Approximate Weight (With Acid)</b>	1.28 lbs. (0.58 kgs)
<b>Recommended Maximum Charging Current</b>	0.55 A
<b>Maximum Charging Voltage</b>	7.4 V @ 25°C
<b>Terminal Type</b>	M
<b>Warranty</b>	1 Year Full Replacement



### Physical Dimensions: in (mm)

**L: 3.50" (89.0 mm) W: 2.76" (70.1 mm) H: 3.90" (99.0 mm)**

Due to continuous improvements to our products, product may vary slightly from depiction.

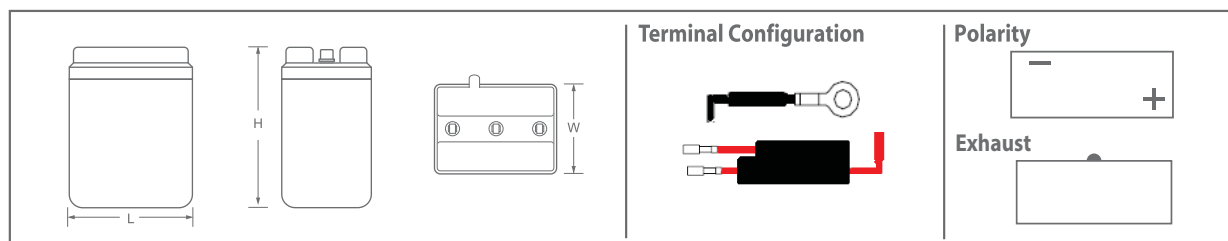

Front



Side



Terminals

### Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vender.
- Only use the acid pack that comes with your battery.
- Fill all cells to the "FULL" mark and wait 30 minutes.
- After 30 minutes, any cell that has settled below the "FULL" mark should be topped off to the "FULL" mark.
- Replace the sealer caps before charging the battery.

### Charging Instructions

- Charge the battery fully before installing.
- Never charge this battery with a charger that delivers more than .55 amps of current. Larger chargers will harm the battery.
- For optimum performance, UPG recommends charging and maintaining with our 6V 500mA dual stage regulated charger.
- This charger/ maintainer can remain connected to the battery indefinitely.

Kinetik® is a registered trademark of Universal Power Group, Inc.

[www.apbatteries.com](http://www.apbatteries.com)

All specifications are subject to change without notice.

[www.upgi.com](http://www.upgi.com)

488 S. Royal Lane | Coppell, Texas 75019 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | [sales@apbatteries.com](mailto:sales@apbatteries.com)

Copyright ©2015 Universal Power Group, Inc. All rights reserved.

S1514-1