



AP SERIES POWERSPORTS BATTERIES

HIGH PERFORMANCE CONVENTIONAL

UPG No. 42002
AP14A-A2
Equivalent to YB14A-A2

Specification


Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	14 Ah
Approximate Weight (With Acid)	9.48 lbs. (4.3 kgs)
Recommended Maximum Charging Current	1.4 A
Maximum Charging Voltage	14.8 V @ 25°C
Terminal Type	D
Warranty	1 Year Full Replacement

Physical Dimensions: in (mm)

L: 5.28" (134 mm) **W:** 3.50" (89.0 mm) **H:** 6.93" (176 mm)



Due to continuous improvements to our products, product may vary slightly from depiction.

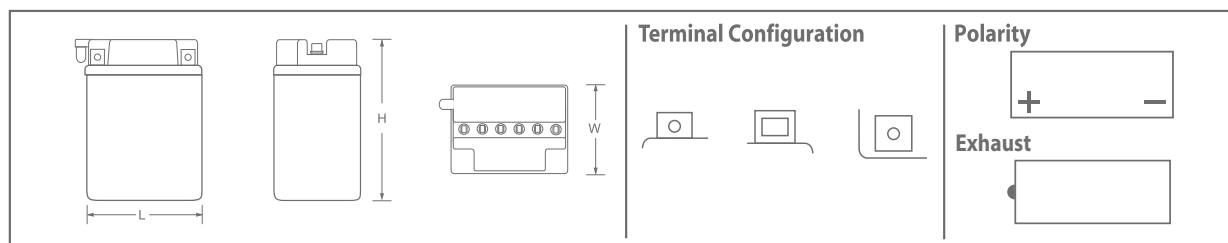

Front



Side



Terminals

Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vender.
- Only use the acid pack that comes with your battery.
- Fill all cells to the "FULL" mark and wait 30 minutes.
- After 30 minutes, any cell that has settled below the "FULL" mark should be topped off to the "FULL" mark.
- Replace the sealer caps before charging the battery.

Charging Instructions

- Charge the battery fully before installing.
- Never charge this battery with a charger that delivers more than 1.4 amps of current. Larger chargers will harm the battery.
- For optimum performance, UPG recommends charging and maintaining with the Adventure Power® Maintainer 1000 battery charger.
- This charger/ maintainer can remain connected to the battery indefinitely.

Kinetik® and Adventure Power® are registered trademarks of Universal Power Group, Inc.

www.apbatteries.com

All specifications are subject to change without notice.

www.upgi.com

488 S. Royal Lane | Coppell, Texas 75019 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@apbatteries.com

Copyright ©2015 Universal Power Group, Inc. All rights reserved.

S1502-1