

RTS BATTERIES

M SEALED AGM




Specification

| Nominal Voltage | 12 Volts |
|--------------------------|-------------------------------|
| Nominal Capacity (10H-R) | 4 Ah |
| CCA | 80 |
| Approximate Weight | 4.19 lbs (1.9 kgs) |
| Recommended Maximum | 0.4 A |
| Charging Current | |
| Maximum Charging Voltage | 14.8 VDC/unit Average at 25°C |
| Terminal Type | D |
| Warranty | 1 Year Full Replacement |



Physical Dimensions: in (mm)

L: 4.50 (114) **W**: 2.76 (70) **H**: 4.21 (107)

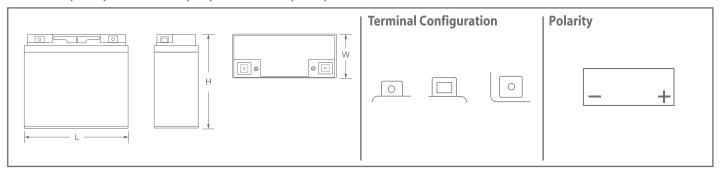







Front

Side

Terminals

Charging Instructions

- Ensure your battery is the correct size for your vehicle.
- This battery is sealed at the factory and is maintenance-free. DO NOT attempt to open to fill this battery.
- Charge the battery fully before installing.
- Never charge the battery with a charger that delivers more than 0.4 amps of current. Larger chargers will harm the battery.

 $\textit{Kinetik} \ ^{\circledcirc} \text{and Adventure Power} \ ^{\circledcirc} \text{are registered trademarks of Universal Power Group, Inc.}$

www.apbatteries.com

All specifications are subject to change without notice.

www.upgi.com