



AP SERIES POWERSPORTS BATTERIES PREMIUM DRY CHARGED AGM

UPG No. 42032

APT_X12-BS


Equivalent to YTX12-BS

Specification

Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	10 Ah
CCA	180
Approximate Weight (With Acid)	7.72 lbs (3.5 kgs)
Recommended Maximum Charging Current	1 A
Maximum Charging Voltage	14.8 VDC/unit Average at 25°C
Terminal Type	D
Warranty	1 Year Full Replacement

Physical Dimensions: in (mm)

L: 6.00 (152) **W :** 3.44 (87) **H:** 5.13 (130)

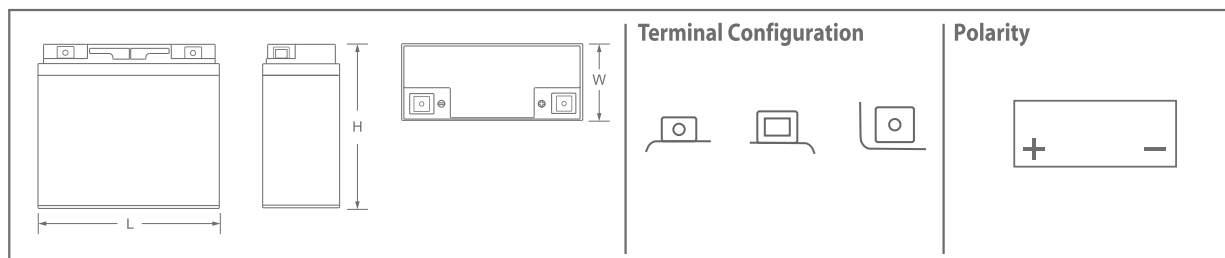

Due to continuous improvements to our products, product may vary slightly from depiction.



Front



Side



Terminals

Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Remove the sealing plugs from electrolyte cells on the battery.
- Remove filler cap strip from electrolyte bottle to expose silver foils. DO NOT remove silver foils.
- Push the bottle down into the cells piercing the seals. Fill your battery with all the contents of the acid pack.
- The bottle contains the exact amount of electrolyte needed for the battery. DO NOT add water.
- After the filling, replace the sealing plugs on each battery cell. Do not remove the sealing plugs for charging.

Charging Instructions

- Charge the battery fully before installing.
- Never charge the battery with a charger that delivers more than 1 amp of current. Larger chargers will harm the battery.
- For optimum performance, Kinetik® recommends charging and maintaining with the Adventure Power® Maintainer 1000 battery charger.
- This charger maintainer can remain connected to the battery indefinitely.

Kinetik® and Adventure Power® are registered trademarks of Universal Power Group, Inc.

www.kinetikpower.com

All specifications are subject to change without notice.

www.upgi.com

488 S. Royal Lane | Coppell, Texas 75019 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@apbatteries.com

U1502-1