



# AP SERIES POWERSPORTS BATTERIES

## HIGH PERFORMANCE CONVENTIONAL

UPG No. 42512  
**AP9L-B**  
Equivalent to YB9L-B

### Specification


Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	9 Ah
Approximate Weight (With Acid)	6.40 lbs. (2.9 kgs)
Recommended Maximum Charging Current	0.9 A
Maximum Charging Voltage	14.8 V @ 25°C
Terminal Type	F
Warranty	1 Year Full Replacement



### Physical Dimensions: in (mm)

**L:** 5.35" (136 mm) **W:** 2.99" (76.0 mm) **H:** 5.49" (139 mm)

Due to continuous improvements to our products, product may vary slightly from depiction.

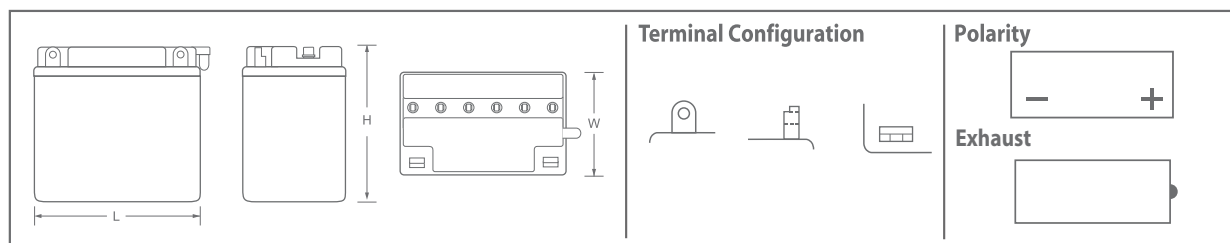

Front



Side



Terminals

### Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Fill all cells to the "FULL" mark and wait 30 minutes.
- After 30 minutes, any cell that has settled below the "FULL" mark should be topped off to the "FULL" mark.
- Replace the sealer caps before charging the battery.

### Charging Instructions

- Charge the battery fully before installing.
- Never charge this battery with a charger that delivers more than 0.9 amps of current. Larger chargers will harm the battery.
- Kinetik recommends our 12V 500mA charger (D1730).

Kinetik® is a registered trademark of Universal Power Group, Inc.

[www.apbatteries.com](http://www.apbatteries.com)

All specifications are subject to change without notice.

[www.upgi.com](http://www.upgi.com)

488 S. Royal Lane | Coppell, Texas 75019 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | [sales@apbatteries.com](mailto:sales@apbatteries.com)

Copyright ©2015 Universal Power Group, Inc. All rights reserved.

S1515-1