



AP SERIES POWERSPORTS BATTERIES

PREMIUM DRY CHARGED AGM

UPG No. 43008

APT7B-BS

Equivalent to YT7B-BS

Specification


Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	6 Ah
CCA	85
Approximate Weight (With Acid)	4.63 lbs (2.1 kgs)
Recommended Maximum Charging Current	0.6 A
Maximum Charging Voltage	14.8 VDC/unit Average at 25°C
Terminal Type	K
Warranty	1 Year Full Replacement



Due to continuous improvements to our products, product may vary slightly from depiction.

Physical Dimensions: in (mm)


L: 5.91 (150) W : 2.56 (65.0) H: 3.74 (95.0)

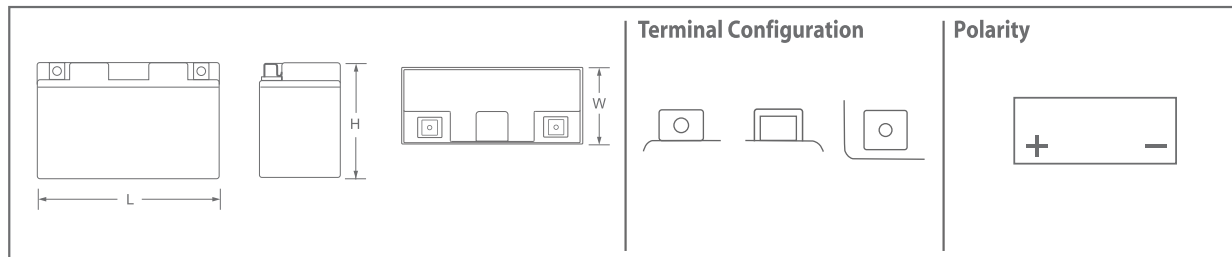

Front



Side



Terminals

Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Remove the sealing plugs from electrolyte cells on the battery.
- Remove filler cap strip from electrolyte bottle to expose silver foils. DO NOT remove silver foils.
- Push the bottle down into the cells piercing the seals. Fill your battery with all the contents of the acid pack.
- The bottle contains the exact amount of electrolyte needed for the battery. DO NOT add water.
- After the filling, replace the sealing plugs on each battery cell. Do not remove the sealing plugs for charging.

Charging Instructions

- Charge the battery fully before installing.
- Never charge the battery with a charger that delivers more than 0.6 amps of current. Larger chargers will harm the battery.

Kinetik® is a registered trademark of Universal Power Group, Inc.