



AP SERIES POWERSPORTS BATTERIES

PREMIUM DRY CHARGED AGM

APT9-B5

UPG No. 43015

Equivalent to YTX9-B5

Specification


Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	8 Ah
CCA	135
Approximate Weight (With Acid)	6.39 lbs (2.9 kgs)
Recommended Maximum Charging Current	0.8 A
Maximum Charging Voltage	14.8 VDC/unit Average at 25°C
Terminal Type	D
Warranty	1 Year Full Replacement



Physical Dimensions: in (mm)

L: 6.00 (152) W: 3.44 (87) H: 4.19 (106)

Due to continuous improvements to our products, product may vary slightly from depiction.

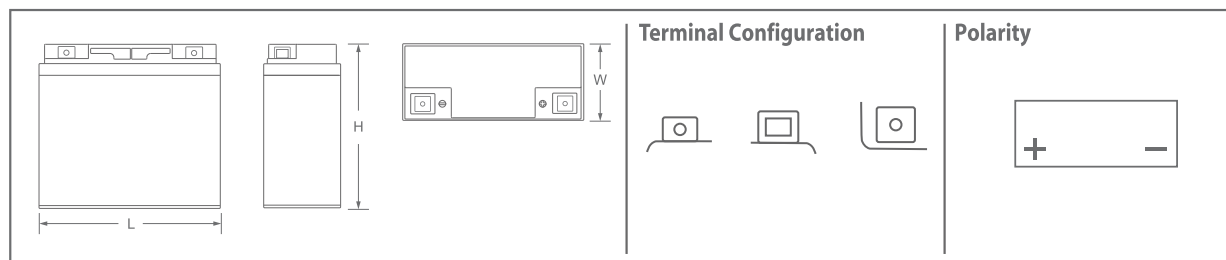

Front



Side



Terminals

Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Remove the sealing plugs from electrolyte cells on the battery.
- Remove filler cap strip from electrolyte bottle to expose silver foils. DO NOT remove silver foils.
- Push the bottle down into the cells piercing the seals. Fill your battery with all the contents of the acid pack.
- The bottle contains the exact amount of electrolyte needed for the battery. DO NOT add water.
- After the filling, replace the sealing plugs on each battery cell. Do not remove the sealing plugs for charging.

Charging Instructions

- Charge the battery fully before installing.
- Never charge the battery with a charger that delivers more than 0.8 amps of current. Larger chargers will harm the battery.

Kinetik® is a registered trademark of Universal Power Group, Inc.