

Warranty

POWERSPORTS BATTERIES

PREMIUM DRY CHARGED AGM



Equivalent to YT14B-BS


Specification	
Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	12 Ah
CCA	210
Approximate Weight (With Acid)	8.60 lbs (3.9 kgs)
Recommended Maximum Charging Current	1.2 A
Maximum Charging Voltage	14.8 VDC/unit Average at 25°C
Terminal Type	K



Due to continuous improvements to our products, product may vary slightly from depiction.

Physical Dimensions: in (mm)

L: 5.91 (150) **W**: 2.72 (69) **H**: 5.71 (145)

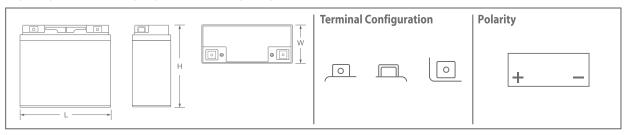

1 Year Full Replacement







Side



Terminals

Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Remove the sealing plugs from electrolyte cells on the battery.
- Remove filler cap strip from electrolyte bottle to expose silver foils. DO NOT remove silver foils.
- Push the bottle down into the cells piercing the seals. Fill your battery with all the contents of the acid pack.
- The bottle contains the exact amount of electrolyte needed for the battery. DO NOT add water.
- After the filling, replace the sealing plugs on each battery cell. Do not remove the sealing plugs for charging.

Charging Instructions

- Charge the battery fully before installing.
- Never charge the battery with a charger that delivers more than 1.2 amps of current. Larger chargers will harm the battery.
- For optimum performance, Kinetik®recommends charging and maintaining with the Adventure Power® Maintainer 1000 battery charger.
- This charger maintainer can remain connected to the battery indefinitely.

Kinetik®and Adventure Power®are registered trademarks of Universal Power Group, Inc.

www.kinetikpower.com All specifications are subject to change without notice. www.upgi.com