



AP SERIES POWERSPORTS BATTERIES PREMIUM DRY CHARGED AGM

APT_X24HL-B5

UPG No. 43034

Equivalent to YTX24HL-B5

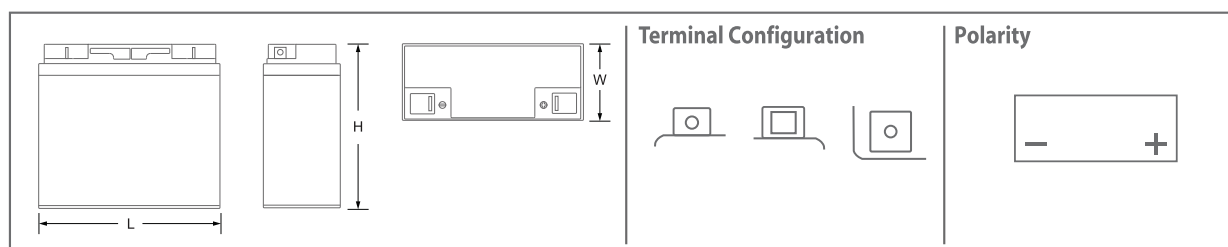
Specification

Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	21 Ah
CCA	350
Approximate Weight (With Acid)	14.30 lbs (6.5 kg)
Recommended Maximum Charging Current	2.1A
Maximum Charging Voltage	14.8 VDC/unit Average at 25°C
Terminal Type	D
Warranty	1 Year Full Replacement



Due to continuous improvements to our products, product may vary slightly from depiction.

Physical Dimensions: in (mm)

L: 8.13 (205) W: 3.44 (87) H: 6.40 (162)

Front



Side



Terminals

Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Remove the sealing plugs from electrolyte cells on the battery.
- Remove filler cap strip from electrolyte bottle to expose silver foils. DO NOT remove silver foils.
- Push the bottle down into the cells piercing the seals. Fill your battery with all the contents of the acid pack.
- The bottle contains the exact amount of electrolyte needed for the battery. DO NOT add water.
- After the filling, replace the sealing plugs on each battery cell. Do not remove the sealing plugs for charging.

Charging Instructions

- Charge the battery fully before installing.
- Never charge the battery with a charger that delivers more than 2.1 amps of current. Larger chargers will harm the battery.
- For optimum performance, UPG recommends charging and maintaining with the Adventure Power® Maintainer 2000 battery charger.
- This charger maintainer can remain connected to the battery indefinitely.