

Absorbant Glass Mat (AGM) technology for superior performance. Valve regulated, spill proof construction allows safe operation in any position. Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified. U.L. recognized under file number MH 20567.

UB23000

Maintenance-Free

Specification

Nominal Voltage			2 Volts
Nominal Capacity			77°F (25°C)
20-hr.	(15.0 A)		300 Ah
10-hr.	(27.9 A)		279 Ah
5-hr.	(51.0 A)		255 Ah
1-hr.	(180.0 A)		180 Ah
Approximate Weight			39.68 lbs (18.0 kgs)
Internal Resistance (approx.)			0.72 mΩ
Shelf Life (% of normal capacity at 77° F (25° C))			
3 Months		6 Months	12 Months
91%		82%	64%
Temperature Dependency of Capacity			(20 hour rate)
104° F (40°C)	77° F (25°C)	32° F (0°C)	5° F (-15°C)
102%	100%	85%	65%
AGM Operational Temperature			
Charge		32°F to 104°F (0°C to 40°C)	
Discharge		5°F to 113°F (-15°C to 45°C)	
AGM Storage Temperature		5°F to 104°F (-15°C to 40°C)	



Charge Method (Constant Voltage)


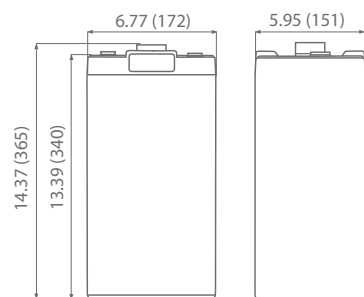
Cycle Use (Repeating Use)

Initial Current	60 A
Control Voltage	2.45 V

Float Use


Control Voltage	2.28 V
-----------------	--------

Physical Dimensions: in (mm)



L: 6.77 in (172 mm)
W: 5.95 in (151 mm)
H: 13.39 in (340 mm)
TH: 14.37 in (365 mm)
 Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

Terminals









Dimension	M	Ø	H
Type I 8	10.0 mm 0.39 in	19.0 mm 0.75 in	2.00 mm 0.08 in

Constant Current Discharge Characteristics Unit:A (25°C, 77°F)

F.V/Time	15MIN	30MIN	60MIN	2HR	3HR	5HR	8HR	10HR	20HR	24HR
1.60	407	317	197	119	87.7	56.3	41.1	30.5	16.0	13.9
1.65	378	294	183	118	87.3	56.1	40.9	30.4	16.0	13.9
1.70	390	304	189	118	86.8	55.8	40.7	30.2	15.8	13.8
1.75	378	294	183	117	86.4	55.5	40.5	30.1	15.8	13.7
1.80	371	289	179	115	84.7	54.4	39.7	30.0	15.8	13.7

Constant Power Discharge Characteristics Unit:W (25°C, 77°F)

F.V/Time	15MIN	30MIN	60MIN	2HR	3HR	5HR	8HR	10HR	20HR	24HR
1.60	732	586	376	219	173	112	82.0	60.9	32.0	27.8
1.65	680	545	350	217	172	112	81.6	60.8	31.9	27.7
1.70	702	562	361	216	171	111	81.2	60.4	31.7	27.5
1.75	680	545	350	215	171	110	80.8	60.2	31.6	27.4
1.80	667	534	343	211	167	108	79.2	60.0	31.5	27.4

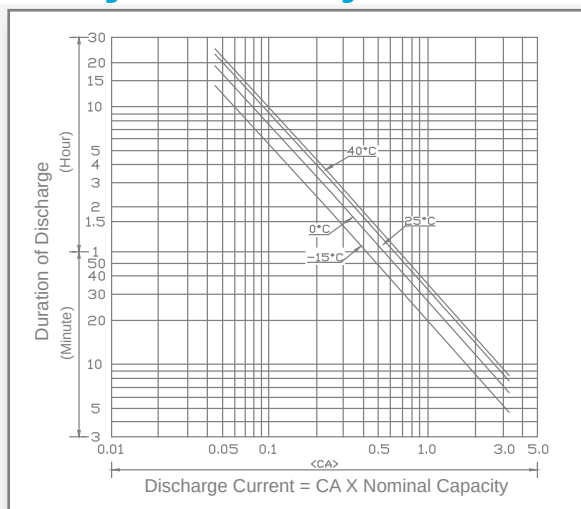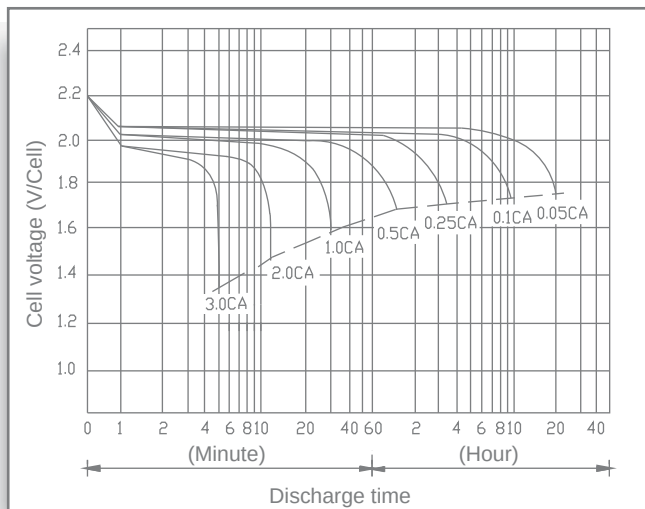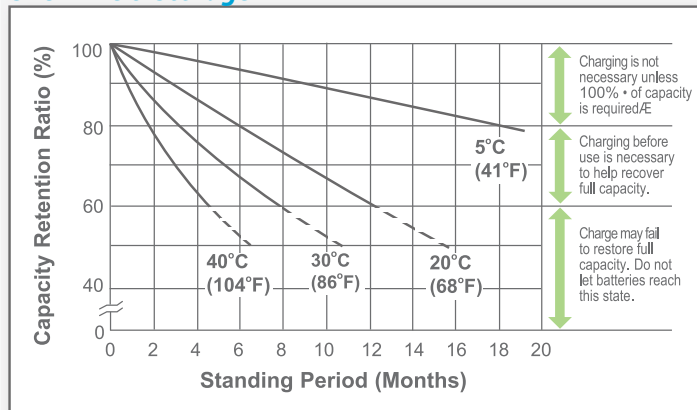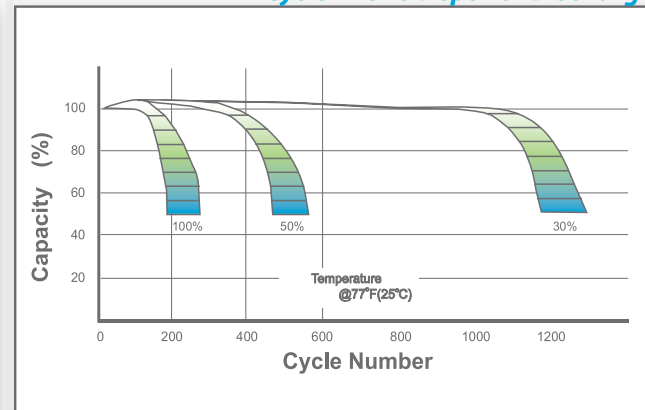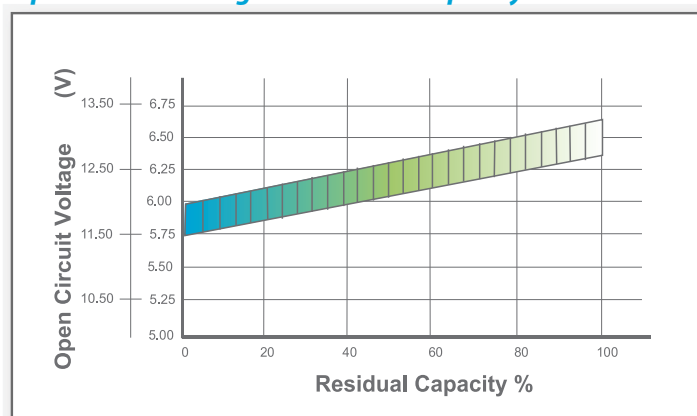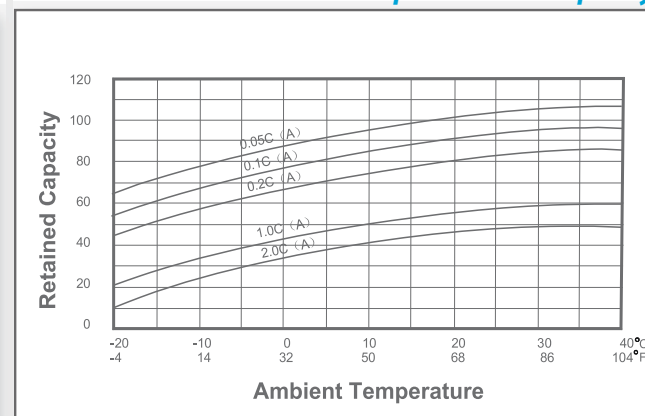Discharge Time vs. Discharge Current**Discharge Characteristics****Shelf Life & Storage****Cycle Life vs Depth of Discharge****Open Circuit Voltage vs Residual Capacity****Effect of Temperature on Capacity****Charge Current & Final Discharge Voltage**

Application	Charge Voltage(V/Cell)			Max.Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C(77°F)	2.45	2.40~2.47	0.30C
Standby	25°C(77°F)	2.30	2.27~2.30	

Final Discharge Voltage V/Cell	1.75	1.70	1.60	1.30
Discharge Current(A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C



ISO 9001 :2008

Let UPG Power Your Life.

www.upgi.com