



AP SERIES POWERSPORTS BATTERIES PREMIUM DRY CHARGED AGM

UPG No. 46066
APT5L-BS
Equivalent to YTX5L-BS

Specification


Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	4 Ah
CCA	60
Approximate Weight (With Acid)	Approx. 4.10 lbs (1.86 kg)
Recommended Maximum Charging Current	.4
Maximum Charging Voltage	14.8 VDC/unit Average at 25°C
Terminal Type	D
Warranty	1 Year Full Replacement



Physical Dimensions: in (mm)

L: 4.50 (114mm) W: 2.81 (71.0mm) H: 4.21 (107 mm)

Due to continuous improvements to our products, product may vary slightly from depiction.

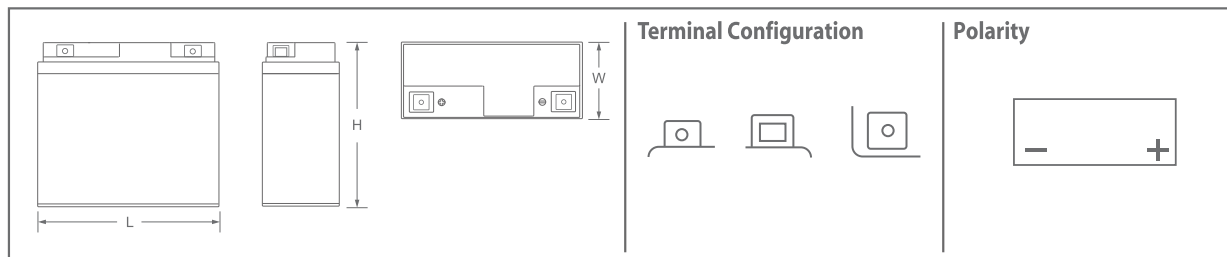

Front



Side



Terminals

Filling Instructions

- ✦ Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vendor.
- ✦ Only use the acid pack that comes with your battery.
- ✦ Remove the sealing plugs from electrolyte cells on the battery.
- ✦ Remove filler cap strip from electrolyte bottle to expose silver foils. DO NOT remove silver foils.
- ✦ Push the bottle down into the cells piercing the seals. Fill your battery with all the contents of the acid pack.
- ✦ The bottle contains the exact amount of electrolyte needed for the battery. DO NOT add water.
- ✦ After the filling, replace the sealing plugs on each battery cell. Do not remove the sealing plugs for charging.

Charging Instructions

- ✦ Charge the battery fully before installing.
- ✦ Never charge the battery with a charger that delivers more than .4 amps of current. Larger chargers will harm the battery.
- ✦ This charger maintainer can remain connected to the battery indefinitely.

Kinetik® is a registered trademark of Universal Power Group, Inc.