



AP SERIES POWERSPORTS BATTERIES PREMIUM DRY CHARGED AGM

UPG No. 46067

APT X7A-BS

Equivalent to YTX7-BS

Specification


Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	7 Ah
CCA	135
Approximate Weight (With Acid)	Approx. 5.81 lbs (2.64 kg)
Recommended Maximum Charging Current	.7 A
Maximum Charging Voltage	14.8 VDC/unit Average at 25°C
Terminal Type	D
Warranty	1 Year Full Replacement

Physical Dimensions: in (mm)

L: 5.94 (151) W: 3.46 (88.0) H: 3.70 (94.0)



Due to continuous improvements to our products, product may vary slightly from depiction.

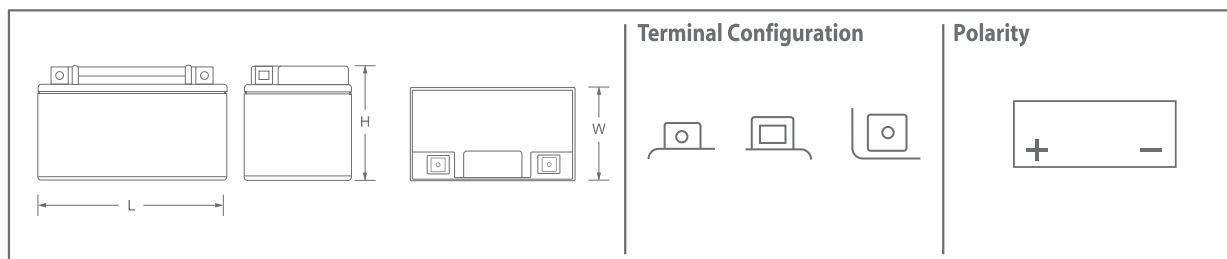

Front



Side



Terminals

Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Remove the foil seal strip from the top of the battery.
- Remove electrolyte bottle from clear plastic wrapping.
- Push the bottle down into the cells piercing the seals. Fill your battery with all the contents of the acid pack.
- The bottle contains the exact amount of electrolyte needed for the battery. DO NOT add water.
- After filling, place the sealing plug strip on each battery cell. Do not remove the sealing plugs for charging.

Charging Instructions

- Charge the battery fully before installing.
 - Never charge the battery with a charger that delivers more than .7 amps of current. Larger chargers will harm the battery.
- Kinetik® and Adventure Power® are registered trademarks of Universal Power Group, Inc.