



AP SERIES POWERSPORTS BATTERIES

PREMIUM DRY CHARGED AGM

UPG No. 46070
APT^X14-BS
Equivalent to YTX14-BS

Specification


Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	12 Ah
CCA	200
Approximate Weight (With Acid)	Approx. 9.43 lbs (4.28 kg)
Recommended Maximum Charging Current	3.6A
Maximum Charging Voltage	14.8 VDC/unit Average at 25°C
Terminal Type	D
Warranty	1 Year Full Replacement

Physical Dimensions: in (mm)

L: 5.94" (151mm) W: 3.43" (87mm) H: 5.79" (147mm)



Due to continuous improvements to our products, product may vary slightly from depiction.

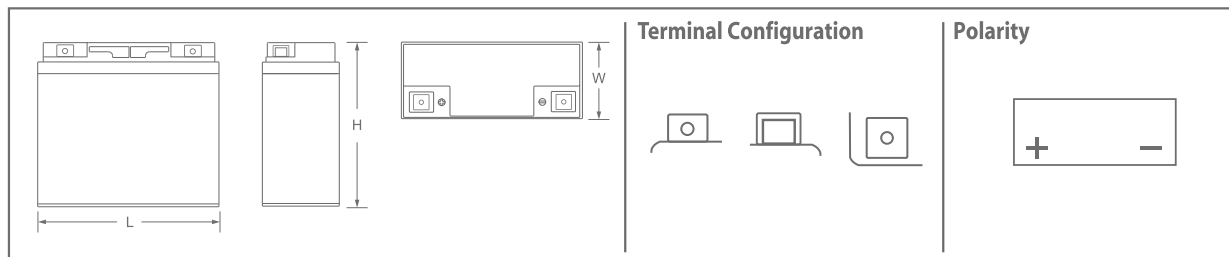

Front



Side



Terminals

Filling Instructions

- ✦ Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vendor.
- ✦ Only use the acid pack that comes with your battery.
- ✦ Remove the sealing plugs from electrolyte cells on the battery.
- ✦ Remove filler cap strip from electrolyte bottle to expose silver foils. DO NOT remove silver foils.
- ✦ Push the bottle down into the cells piercing the seals. Fill your battery with all the contents of the acid pack.
- ✦ The bottle contains the exact amount of electrolyte needed for the battery. DO NOT add water.
- ✦ After the filling, replace the sealing plugs on each battery cell. Do not remove the sealing plugs for charging.

Charging Instructions

- ✦ Charge the battery fully before installing.
- ✦ Never charge the battery with a charger that delivers more than 4 amps of current. Larger chargers will harm the battery.
- ✦ For optimum performance, Kinetik® recommends charging and maintaining with the Adventure Power® Maintainer 4000 battery charger.
- ✦ This charger maintainer can remain connected to the battery indefinitely.

Kinetik® and Adventure Power® are registered trademarks of Universal Power Group, Inc.

www.kinetikpower.com

All specifications are subject to change without notice.

www.upgi.com

488 S. Royal Lane | Coppell, Texas 75019 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@apbatteries.com

M1504-1