



AP SERIES POWERSPORTS BATTERIES PREMIUM DRY CHARGED AGM

UPG No. 46073

APT_X20L-BS

Equivalent to YTX20L-BS

Specification


| | |
|---|-------------------------------|
| Nominal Voltage | 12 Volts |
| Nominal Capacity (10H-R) | 18 Ah |
| CCA | 270 |
| Approximate Weight (With Acid) | 11.6 lbs (5.26 kg) |
| Recommended Maximum Charging Current | 1.8A |
| Maximum Charging Voltage | 14.8 VDC/unit Average at 25°C |
| Terminal Type | D |
| Warranty | 1 Year Replacement |



Physical Dimensions: in (mm)

L: 6.89 (175.0) **W:** 3.43 (87.1) **H:** 6.14 (156.0)

Due to continuous improvements to our products, product may vary slightly from depiction.

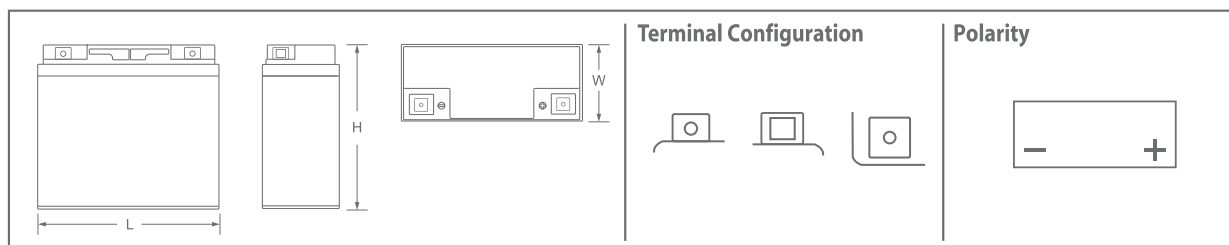

Front



Side



Terminals

Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Remove the sealing plugs from electrolyte cells on the battery.
- Remove filler cap strip from electrolyte bottle to expose silver foils. DO NOT remove silver foils.
- Push the bottle down into the cells piercing the seals. Fill your battery with all the contents of the acid pack.
- The bottle contains the exact amount of electrolyte needed for the battery. DO NOT add water.
- After the filling, replace the sealing plugs on each battery cell. Do not remove the sealing plugs for charging.

Charging Instructions

- Charge the battery fully before installing.
- Never charge the battery with a charger that delivers more than 1.8 amps of current. Larger chargers will harm the battery.
- For optimum performance, Kinetik® recommends charging and maintaining with the Adventure Power® Maintainer 1000 battery charger.
- This charger maintainer can remain connected to the battery indefinitely.

Kinetik® and Adventure Power® are registered trademarks of Universal Power Group, Inc.

www.kinetikpower.com

All specifications are subject to change without notice.

www.upgi.com

488 S. Royal Lane | Coppell, Texas 75019 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@apbatteries.com

U1503-1