



# AP SERIES POWERSPORTS BATTERIES

UPG No. 48120

# APP7L

## Lithium Iron Phosphate

Specially designed as a high-performance lithium starting battery. Characteristics are 1/3 the weight of a normal lead-acid battery, non polluting, super cranking power, quick recharge capability and excellent cycle life.

### Specification

<b>Nominal Voltage</b>	12.8 Volts
<b>Nominal Capacity (10H-R)</b>	2 Ah (Equal in starting performance to a 7Ah SLA)
<b>CCA</b>	120
<b>Approximate Weight</b>	1.10 lbs (0.5 kgs)
<b>Charging Current</b>	Standard: 1.0A, Max: 10.0A
<b>Charging Voltage Limit</b>	14.4±0.5
<b>Operating Temperature Range</b>	Discharge: -10°C ~ 60°C Charge: 0°C ~ 45°C Storage: -20°C ~ 40°C
<b>Cycle Life</b>	≥1000
<b>Self Discharge</b>	Batteries can be stored for 12 months at 25°C. For higher temperatures the duration will be shorter
<b>LED SOC Indicator</b>	Indicates the battery state of charge
<b>Warranty</b>	1 Year Full Replacement


**For starting mass produced internal combustions engines only.**



Due to continuous improvements to our products, product may vary slightly from depiction.

### Physical Dimensions: in (mm)

**L: 4.21 (107) W : 2.20 (56) H: 3.35 (85)**

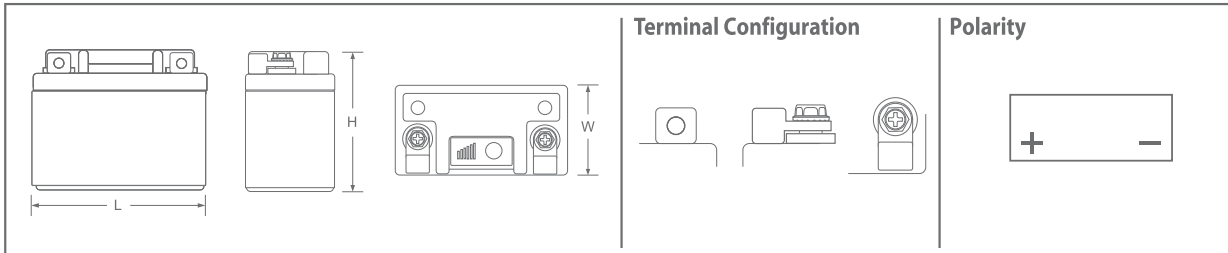


Front



Side



Terminals

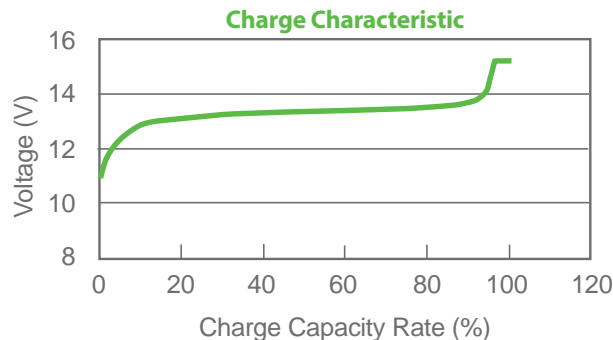

Kinetik® is a registered trademark of Universal Power Group, Inc.

[www.kinetikpower.com](http://www.kinetikpower.com)

All specifications are subject to change without notice.

[www.upgi.com](http://www.upgi.com)

488 S. Royal Lane | Coppell, Texas 75019 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | [sales@apbatteries.com](mailto:sales@apbatteries.com)

U1515-1