



AP SERIES POWERSPORTS BATTERIES

UPG No. 48127

APP20L

Lithium Iron Phosphate

Specially designed as a high-performance lithium starting battery. Characteristics are 1/3 the weight of a normal lead-acid battery, non polluting, super cranking power, quick recharge capability and excellent cycle life.

Specification

Nominal Voltage	12.8 Volts
Nominal Capacity (10H-R)	7 Ah (Equal in starting performance to a 20Ah SLA)
CCA	370
Approximate Weight	3.09 lbs (1.4 kgs)
Charging Current	Standard: 3.5A, Max: 28.0A
Charging Voltage Limit	14.4±0.5
Operating Temperature Range	Discharge: -10°C ~ 60°C Charge: 0°C ~ 45°C Storage: -20°C ~ 40°C
Cycle Life	≥1000
Self Discharge	Batteries can be stored for 12 months at 25°C. For higher temperatures the duration will be shorter
LED SOC Indicator	Indicates the battery state of charge
Warranty	1 Year Full Replacement


For starting mass produced internal combustions engines only.



Due to continuous improvements to our products, product may vary slightly from depiction.

Physical Dimensions: in (mm)

L: 5.91 (150) W : 3.43 (87) H: 4.13 (105)

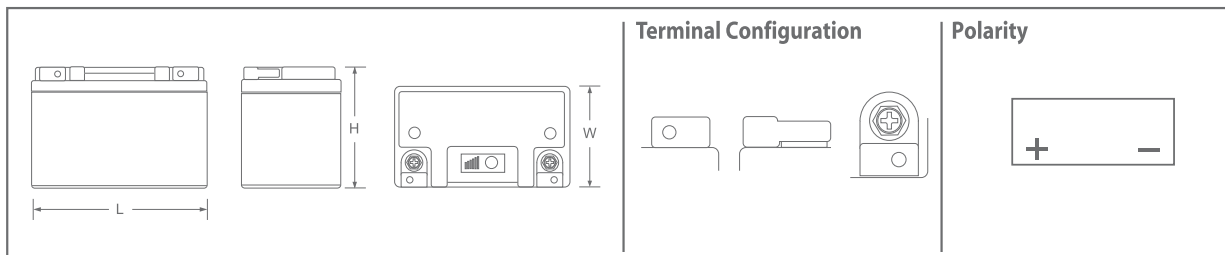


Front



Side



Terminals

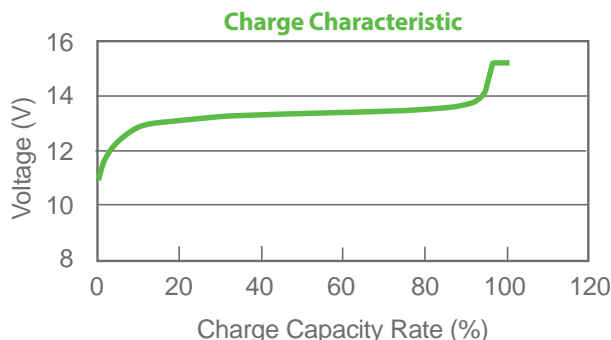

Kinetik® is a registered trademark of Universal Power Group, Inc.

www.kinetikpower.com

All specifications are subject to change without notice.

www.upgi.com

488 S. Royal Lane | Coppell, Texas 75019 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@apbatteries.com

U1519-1