



AP SERIES POWERSPORTS BATTERIES

STANDARD CONVENTIONAL

UPG No. 41544

AP12N12A-4A-1

Equivalent to 12N12A-4A-1

Specification


Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	12 Ah
Approximate Weight (With Acid)	7.72 lbs. (3.5 kgs)
Recommended Maximum Charging Current	1.2 A
Maximum Charging Voltage	14.8 V @ 25°C
Terminal Type	F
Warranty	1 Year Full Replacement



Physical Dimensions: in (mm)

L: 5.24 (133) **W:** 3.15 (80) **H:** 6.30 (160)

Due to continuous improvements to our products, product may vary slightly from depiction.

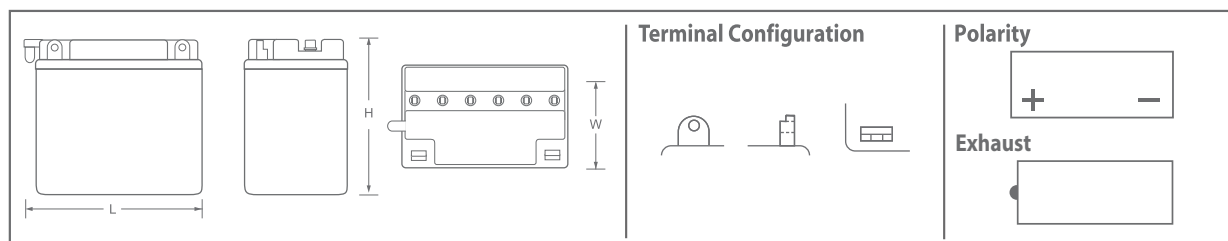

Front



Side



Terminals

Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Fill all cells to the "FULL" mark and wait 30 minutes.
- After 30 minutes, any cell that has settled below the "FULL" mark should be topped off to the "FULL" mark.
- Replace the sealer caps before charging the battery.

Charging Instructions

- Charge the battery fully before installing.
- Never charge this battery with a charger that delivers more than 1.2 amps of current. Larger chargers will harm the battery.
- Kinetik recommends our 12V 500mA charger (D1730).

Kinetik® is a registered trademark of Universal Power Group, Inc.

www.kinetikpower.com

All specifications are subject to change without notice.

www.upgi.com

488 S. Royal Lane | Coppell, Texas 75019 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@upgi.com

Copyright ©2017 Universal Power Group, Inc. All rights reserved.

J1712-1